Goodman®

Air Conditioning & Heating

Product Specifications

GSC13

13 SEER

High-Efficiency Split System Air Conditioner

Residential

10 YEAR PARTS LIMITED WARRANTY

Commercial

5 YEAR PARTS LIMITED WARRANTY

GoodCare EXTENDED SERVICE PLAN

ETL LISTED

ARI PERFORMANCE CERTIFIED

1½ to 5 Ton

The GSC13 Split System Air Conditioner features the unique Goodman® sound control top designed for quiet operation. In addition, the unit has an attractive louvered metal guard that protects the coil from damage plus a powder-paint finish that provides premium durability and improved UV protection.

Standard Features

- Energy-efficiency compressor
- Quiet condenser fan system
- Factory-installed liquid line filter dryer
- Copper tube/aluminum fin coil
- R-22 refrigerant-charged for 15' of refrigerant lines
- Brass liquid and suction service valves with sweat connections
- Contactor with lug connections
- Ground lug connection
- ARI Certified; ETL Listed

Air Handler and Coil Compatibilities

- ARPF, ADPF, ARUF, AEPF — versatile upflow, horizontal or downflow air handlers; may be located in closets, utility rooms, attics, or basements
- AWUF vertical wall-mounted electric heat air handlers
- ACNF ceiling-mounted electric heat air handlers
- MBR/MBE modular blower
- CA, CH, and CSCF indoor coils

Cabinet Features

- Unique Goodman® sound control top design
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- When properly anchored, meets the 2001 Florida Building Code unit integrity requirements for hurricane-type winds

Accessories

- Anchor Bracket Kit
- Anti-Short Cycle Kit
- Hard-start Kit
- Freeze Protection Kit
- Liquid Line Solenoid Kit
- Outdoor Thermostat

NOMENCLATURE

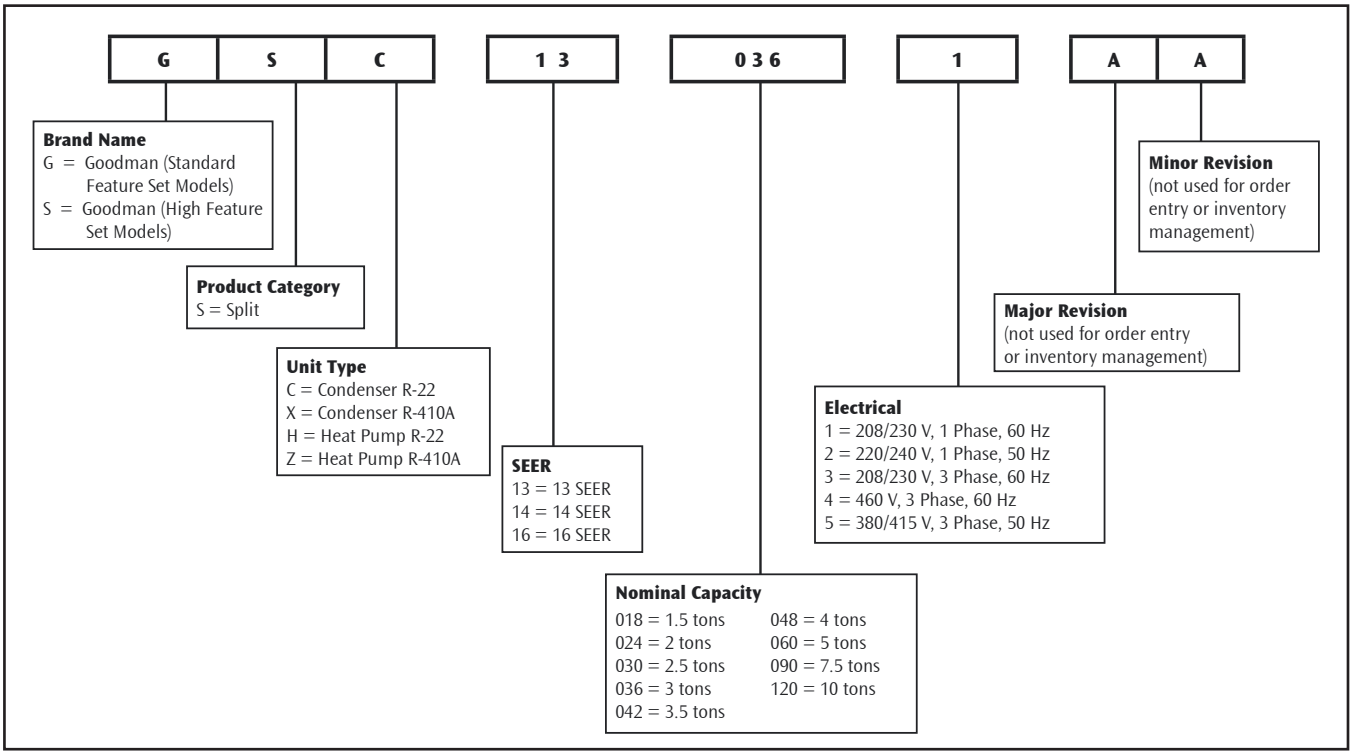

SPECIFICATIONS

	GSC13-0181AA	GSC13 0241A	GSC13 0241C	GSC13 0301A	GSC13 0361A	GSC13 0361B	GSC13 0361C	GSC13 0361D
Cooling Capacities								
Nominal Cooling (BTU/h)	18,000	24000	24,000	30,000	36,000	36,000	36,000	36,000
Decibels	76	76	76	76	76	76	76	76
Compressor								
RLA	6.2	7.7	10.4	9.7	12.2	12.5	11.2	12.2
LRA	35.0	40.0	54.0	49.0	73.0	73.0	68.0	73.0
Condenser Fan Motor								
Horsepower	1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6
FLA	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Refrigeration System								
Liquid Valve Size (“O.D.)	⅜”	⅜”	⅜”	⅜”	⅜”	⅜”	⅜”	⅜”
Suction Valve Size (“O.D.)	¾”	¾”	¾”	¾”	¾”	¾”	¾”	¾”
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	95	99	102	123	125	125	120	125
Shipped with Orifice Size	0.055	0.059	0.059	0.065	0.074	0.071	0.074	0.074
Electrical Data								
AC Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
Hz / Phase	60 Hz/1	60 Hz/1	60 Hz/1	60 Hz/1	60 Hz/1	60 Hz/1	60 Hz/1	60 Hz/1
Min. Circuit Ampacity[1]	9.3	11.2	14.6	13.6	16.8	17.1	15.5	16.8
Max. Overcurrent Device[2]	15	15	20	20	20	30	20	25
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	½” or ¾”	½” or ¾”	½” or ¾”	½” or ¾”	½” or ¾”	½” or ¾”	½” or ¾”	½” or ¾”
Ship Weight (lbs)	173	195	182	195	199	205	214	199

[1] Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

[2] Must use time-delay fuses or HACR-type circuit breakers of the same size as noted

SPECIFICATIONS (CONT.)

	GSC13 0361E	GSC13 0363A	GSC13 0421AA	GSC13 0481AA	GSC13 0483A	GSC13 0484AA	GSC13 0601B	GSC13 0603A	GSC13 0604A
Cooling Capacities									
Nominal Cooling (BTU/h)	36,000	36,000	42,000	48,000	48,000	48,000	57,000	57,000	57,000
Decibels	76	76	76	76	76	76	76	76	76
Compressor									
RLA	11.2	9.0	14.7	17.9	12.4	5.8	25.0	17.3	6.7
LRA	68.0	65.5	77.0	104.0	88.0	44.0	148.0	123.0	49.5
Condenser Fan Motor									
Horsepower	1/6	1/6	¼	¼	¼	¼	1/6	1/6	1/6
FLA	1.5	1.5	1.6	1.6	1.6	0.8	1.1	1.1	0.6
Refrigeration System									
Liquid Valve Size (“O.D.)	⅜”	⅜”	⅜”	⅜”	⅜”	⅜”	⅜”	⅜”	⅜”
Suction Valve Size (“O.D.)	¾”	¾”	⅞”	⅞”	⅞”	⅞”	⅞”	⅞”	⅞”
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	120	125	143	158	158	158	175	175	175
Shipped with Orifice Size	0.074	0.074	0.078	0.082	0.082	0.082	0.093	0.093	0.093
Electrical Data									
AC Volts	208/230	208/230	208/230	208/230	208/230	460	208/230	208/230	460
Hz / Phase	60 Hz/1	60 Hz/3	60 Hz/1	60 Hz/1	60 Hz/3	60 Hz/3	60 Hz/1	60 Hz/3	60 Hz/3
Min. Circuit Ampacity[1]	15.5	12.7	20	24	17.2	8.0	32.3	22.7	9.0
Max. Overcurrent Device[2]	25	20	30	40	20	15	50	40	15
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	414/506	197/253	197/253	414/506
Electrical Conduit Size	½” or ¾”	½” or ¾”	½” or ¾”	½” or ¾”	½” or ¾”	½” or ¾”	½” or ¾”	½” or ¾”	½” or ¾”
Ship Weight (lbs)	214	198	199	207	207	207	242	242	242

[1] Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

[2] Must use time-delay fuses or HACR-type circuit breakers of the same size as noted

DIMENSIONS

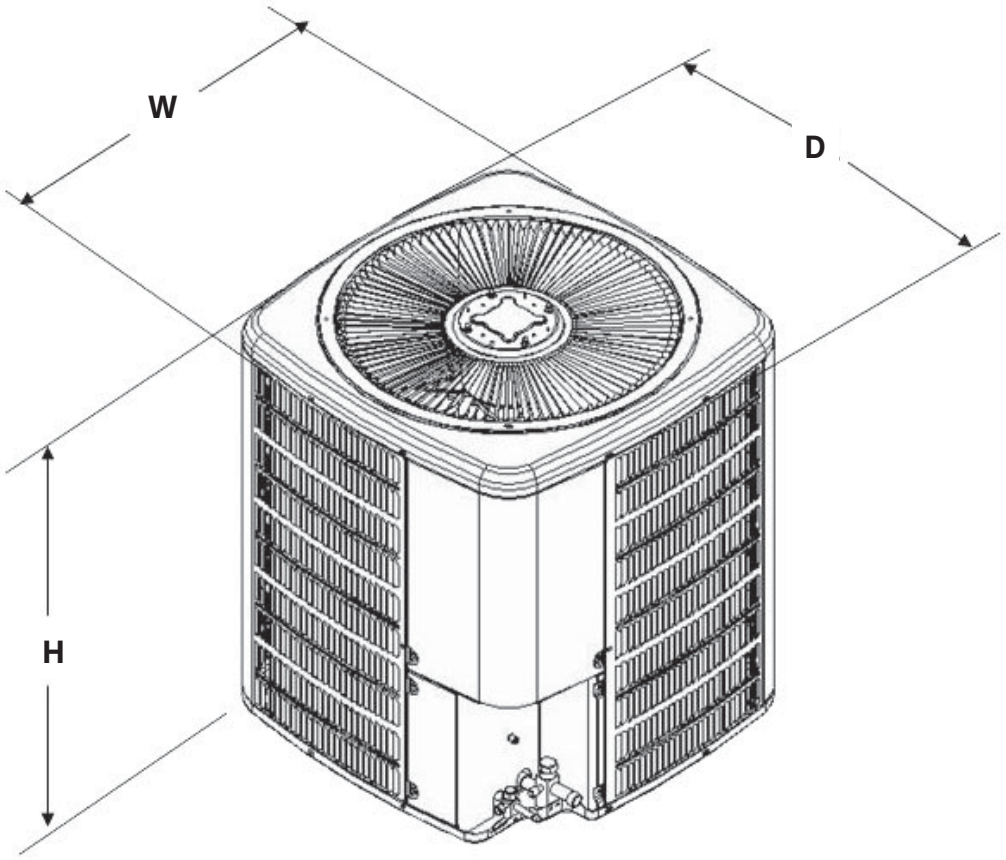

Model	Dimensions W x D x H
GSC130181A	26 x 26 x 29¾
GSC130241A	26 x 26 x 34¾
GSC130241C	26 x 26 x 34¾
GSC130301A	29 x 29 x 34¾
GSC130361A	29 x 29 x 34¼
GSC130361BA	29 x 29 x 34¾
GSC130361CA	29 x 29 x 34¾
GSC130361D	29 x 29 x 34¾
GSC130361E	29 x 29 x 34¾
GSC130363A	29 x 29 x 34¼
GSC130421A	29 x 29 x 34¼
GSC130481A	29 x 29 x 38¼
GSC130483A	29 x 29 x 38¼
GSC130484A	29 x 29 x 38¼
GSC130601B	35½ x 35½ x 38¼
GSC130603A	35½ x 35½ x 38¼
GSC130604A	35½ x 35½ x 38¼

PERFORMANCE RATINGS

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER[1]	EER[2]	ARI #
		Total	Sensible			
GSC13 0181A*	AC18-XX	18,000	12,800	13	11.5	728986
	ACNF018-XX1A*	18,000	12,800	13	11.5	728989
	ADPF018241A*	19,000	13,500	13	11.5	734454
	ADPF182416A*	19,000	13,500	13	11.5	1038100
	ADPF18241A*	19,000	13,500	13	11.5	1038136
	AEPF183016A*	19,000	13,500	14	12.2	1038101
	AEPF18301A*	19,000	13,500	14	12.2	734461
	AEPT030-00*-1*	19,000	13,500	14	12.2	734428
	ARPF036-00B-1*	19,000	13,500	13	11.5	734445
	ARPF182416A*	19,000	13,500	13	11.5	1038102
	ARPF18241A*	19,000	13,500	13	11.5	734443
	ARPT032-00*-1*	19,000	13,500	13	11.5	734466
	ARUF032-00*-1*	19,000	13,500	13	11.5	734435
	ARUF182416A*	19,000	13,500	13	11.5	1038103
	ARUF18241A*	19,000	13,500	13	11.5	734444
	AWB24-XX	18,000	12,800	13	11.5	728988
	AWUF18XX1A*	18,000	12,800	13	11.5	728987
	CA*F030*2*+EEP	19,000	13,500	13	11.5	734419
	CA*F030*2*+G*V80704B**	19,000	13,500	14	12.2	734458
	CA*F030*2*+G*V90704C**	19,000	13,500	14	12.2	734433
	CA*F030*2*+G*V950453B**	19,000	13,500	14	12.2	734421
	CA*F030*2*+MBE1200	19,000	13,500	14	12.2	734423
	CA*F1824*6A*+EEP	19,000	13,500	13	11.5	734464
	CA*F1824*6A*+G*V80704B**	19,000	13,500	14	12.2	734425
	CA*F1824*6A*+G*V90704C**	19,000	13,500	14	12.2	734462
	CA*F1824*6A*+G*V950453B**	19,000	13,500	14	12.2	734460
	CA*F1824*6A*+G*V950704C**	19,000	13,500	14	12.2	734451
	CA*F1824*6A+MBE1200	19,000	13,500	14	12.2	734447
	CA*F3030*6A*+G*V950704C**	19,000	13,500	14	12.2	734456
	CHPF030A2*+EEP	19,000	13,500	13	11.5	734465
	CHPF042B2*+EEP	19,000	13,500	13	11.5	879223
	CHPF042B2*+G*V80704B**	19,600	13,500	14	12.2	734427
	CHPF042B2*+G*V90704C**	19,600	13,500	14	12.2	734420
	CHPF042B2*+G*V950453B**	19,600	13,500	14	12.2	734437
	CHPF1824A6A*+EEP	19,000	13,500	13	11.5	734429
	CHPF2430B6A*+EEP	19,000	13,500	13	11.5	879233
	CHPF2430B6A*+G*V80704B**	19,600	13,500	14	12.2	734439
	CHPF2430B6A*+G*V90704C**	19,600	13,500	14	12.2	734432
	CHPF2430B6A*+G*V950453B**	19,600	13,500	14	12.2	736261
	CSCF1824N6A*+EEP	19,000	13,500	13	11.5	734440
	CSCF1824N6A*+G*V80704B**	19,000	13,500	14	12.2	734441
	CSCF1824N6A*+G*V90704C**	19,000	13,500	14	12.2	734457
	CSCF1824N6A*+G*V950453B**	19,000	13,500	14	12.2	736247
	H36F+EEP	19,000	13,500	13	11.5	734422
	H36F+G*V80704B**	19,000	13,500	14	12.2	734430
	H36F+G*V90704C**	19,000	13,500	14	12.2	734448
	H36F+G*V950453B**	19,000	13,500	14	12.2	734424

[1] Seasonal Energy Efficiency Ratio
[2] Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

See Notes on Page 9.

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER[1]	EER[2]	ARI #
		Total	Sensible			
GSC13 0241C*	AC30-XX	23,000	16,400	13	11.5	734463
	ACNF24XX1A*	23,000	16,400	13	11.5	734459
	ADPF018241A*	23,000	16,400	13	11.5	734446
	ADPF182416A*	23,000	16,330	13	11.5	1038104
	ADPF18241A*	23,000	16,330	13	11.5	1038137
	AEPF183016A*	23,800	16,898	14	12.2	1038105
	AEPF18301A*	23,800	17,000	14	12.2	734436
	AEPT030-00*-1*	23,800	17,000	14	12.2	734426
	ARPF036-00B-1*	23,000	16,400	13	11.5	734431
	ARPF182416A*	23,000	16,330	13	11.5	1038106
	ARPF18241A*	23,000	16,400	13	11.5	734438
	ARPT032-00*-1*	23,000	16,400	13	11.5	734450
	ARUF032-00*-1*	23,000	16,400	13	11.5	734442
	ARUF182416A*	23,000	16,330	13	11.5	1038107
	ARUF18241A*	23,000	16,400	13	11.5	734434
	AWB24-XX	23,000	16,400	13	11.5	734452
	AWUF24XX1A*	23,000	16,400	13	11.5	734455
	CA*F030*2*+EEP	23,000	16,400	13	11.5	734449
	CA*F030*2*+G*V80704B**	23,000	16,400	14	12.2	734664
	CA*F030*2*+G*V90704C**	23,000	16,400	14	12.2	734803
	CA*F030*2*+G*V950453B**	23,000	16,400	14	12.2	734884
	CA*F030*2*+G*V950704C**	23,000	16,400	14	12.2	734821
	CA*F030*2*+MBE1200	23,000	16,400	14	12.2	734802
	CA*F1824*6A*+EEP	23,000	16,400	13	11.5	734453
	CA*F1824*6A*+G*V80704B**	23,000	16,400	14	12.2	734742
	CA*F1824*6A*+G*V90704C**	23,000	16,400	14	12.2	734806
	CA*F1824*6A*+G*V950453B**	23,000	16,400	14	12.2	734660
	CA*F1824*6A*+G*V950704C**	23,000	16,400	14	12.2	734848
	CA*F1824*6A+MBE1200	23,000	16,400	14	12.2	734705
	CHPF030A2*+EEP	23,000	16,400	13	11.5	734736
	CHPF042B2*+EEP	23,400	16,614	13	11.5	879222
	CHPF042B2*+G*V80704B**	23,800	17,000	14	12.2	734841
	CHPF042B2*+G*V90704C**	23,800	17,000	14	12.2	734657
	CHPF042B2*+G*V950453B**	23,800	17,000	14	12.2	734894
	CHPF1824A6A*+EEP	23,000	16,400	13	11.5	734744
	CHPF2430B6A*+EEP	23,400	16,614	13	11.5	879282
	CHPF2430B6A*+G*V80704B**	23,800	17,000	14	12.2	734836
	CHPF2430B6A*+G*V90704C**	23,800	17,000	14	12.2	734773
	CHPF2430B6A*+G*V950453B**	23,800	17,000	14	12.2	734656
	CSCF1824N6A*+EEP	23,000	16,400	13	11.5	734692
	CSCF1824N6A*+G*V80704B**	23,000	16,400	14	12.2	734818
	CSCF1824N6A*+G*V90704C**	23,000	16,400	14	12.2	734775
	CSCF1824N6A*+G*V950453B**	23,000	16,400	14	12.2	734823
	H36F+EEP	23,000	16,400	13	11.5	734691
	H36F+G*V80704B**	23,000	16,400	14	12.2	734840
	H36F+G*V90704C**	23,000	16,400	14	12.2	734767
	H36F+G*V950453B**	23,000	16,400	14	12.2	734880

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER[1]	EER[2]	ARI #
		Total	Sensible			
GSC13 0301A*	AC36-XX	28,000	20,500	13	11.5	734698
	ACNF30XX1A*	28,000	20,500	13	11.5	734815
	ADPF304216A*	29,000	21,460	13	11.5	1038108
	ADPF30421A*	29,000	21,500	13	11.5	734826
	AEPF183016A*	29,000	21,460	14	12.2	1038109
	AEPF18301A*	29,000	21,500	14	12.2	734732
	AEPT030-00*-1*	29,000	21,500	14	12.2	734714
	ARPF048-00B-1*	29,000	21,500	13	11.5	734798
	ARPF303016A*	29,000	21,460	13	11.5	1038110
	ARPF30301A*	29,000	21,500	13	11.5	734886
	ARPT042-00*-1*	29,000	21,500	13	11.5	734879
	ARUF042-00*-1*	29,000	21,500	13	11.5	734889
	ARUF182416A*	27,600	20,424	13	11.5	1038144
	ARUF18241A*	27,600	20,424	13	11.5	1038143
	ARUF303016A*	29,000	21,460	13	11.5	1038111
	ARUF30301A*	29,000	21,500	13	11.5	734784
	AWB36-XX	28,000	20,500	13	11.5	734873
	AWUF36XX1A*	28,000	20,500	13	11.5	734875
	CA*F037*2*+EEP	29,000	21,500	13	11.5	734718
	CA*F037*2*+G*V80704B**	29,000	21,500	14	12.2	734672
	CA*F037*2*+G*V90704C**	29,000	21,500	14	12.2	734651
	CA*F037*2*+G*V950453B**	29,000	21,500	14	12.2	734774
	CA*F037*2*+G*V950704C**	29,000	21,500	14	12.2	734902
	CA*F037*2*+MBE1200**-1	29,000	21,500	14	12.2	734687
	CA*F042*2*+EEP	29,000	21,460	13	11.5	879290
	CA*F3030*6A*+EEP	29,000	21,500	13	11.5	734671
	CA*F3030*6A*+G*V80704B**	29,000	21,500	14	12.2	734807
	CA*F3030*6A*+G*V90704C**	29,000	21,500	14	12.2	736252
	CA*F3030*6A*+G*V950453B**	29,000	21,500	14	12.2	734781
	CA*F3030*6A*+G*V950704C**	29,000	21,500	14	12.2	734724
	CA*F3030*6A*+MBE1200	29,000	21,500	14	12.2	734816
	CA*F3131*6A*+EEP	29,000	21,460	13	11.5	879204
	CHPF030A2*+EEP	28,400	21,016	13	11.5	1002299
	CHPF042B2*+EEP	29,000	21,500	13	11.5	734727
	CHPF042B2*+G*V80704B**	29,400	21,800	14	12.2	734801
	CHPF042B2*+G*V90704C**	29,400	21,800	14	12.2	734748
	CHPF042B2*+G*V950453B**	29,400	21,800	14	12.2	734726
	CHPF2430B6A*+EEP	29,000	21,500	13	11.5	734900
	CHPF2430B6A*+G*V80704B**	29,400	21,800	14	12.2	734888
	CHPF2430B6A*+G*V90704C**	29,400	21,800	14	12.2	734865
	CHPF2430B6A*+G*V950453B**	29,400	21,800	14	12.2	734666
	CSCF3036N6A*+EEP	29,000	21,500	13	11.5	734814
	CSCF3036N6A*+G*V80704B**	29,000	21,500	14	12.2	734809
	CSCF3036N6A*+G*V90704C**	29,000	21,500	14	12.2	734728
	CSCF3036N6A*+G*V950453B**	29,000	21,500	14	12.2	734794
	H49F+EEP	29,000	21,500	13	11.5	734795
	H49F+G*V80704B**	29,000	21,500	14	12.2	734746
	H49F+G*V90704C**	29,000	21,500	14	12.2	734837
	H49F+G*V950453B**	29,000	21,500	14	12.2	734761

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER[1]	EER[2]	ARI #
		Total	Sensible			
GSC130 361A*	ADPF304216A*	35,000	25,550	13	11.5	1038112
	ADPF30421A*	35,000	25,400	13	11.5	734661
	AEPF303616A*	35,000	25,550	14	12.2	1038113
	AEPF30361A*	35,000	25,400	14	12.2	734747
	AEPT036-00*-1*	35,000	25,400	14	12.2	734717
	ARPF048-00B-1*	35,000	25,400	13	11.5	734704
	ARPF364216A*	35,000	25,550	13	11.5	1038114
	ARPF36421A*	35,000	25,400	13	11.5	734842
	ARPT049-00*-1*	35,000	25,400	13	11.5	734693
	ARUF049-00*-1*	35,000	25,550	13	11.5	736539
	ARUF364216A*	33,600	24,528	13	11.5	1038115
	ARUF36421A*	35,000	25,550	13	11.5	736528
	AWB36-XX	33,600	24,400	13	11.5	734730
	AWUF36XX1A*	33,600	24,400	13	11.5	734799
	CA*F048*2*+EEP	35,000	25,400	13	11.5	734668
	CA*F048*2*+G*V80704B**	35,000	25,400	14	12.2	734680
	CA*F048*2*+G*V80905C**	35,000	25,400	14	12.2	734787
	CA*F048*2*+G*V90905D**	35,000	25,400	14	12.2	734819
	CA*F048*2*+G*V950905D**	35,000	25,400	14	12.2	734760
	CA*F048*2*+G*V951155D**	35,000	25,400	14	12.2	734856
	CA*F048*2*+MBE1600	35,000	25,400	14	12.2	734739
	CA*F3636*6A*+EEP	35,000	25,400	13	11.5	734824
	CA*F3636*6A*+G*V80704B**	35,000	25,400	14	12.2	734722
	CA*F3636*6A*+G*V80905C**	35,000	25,400	14	12.2	734891
	CA*F3636*6A*+G*V90905D**	35,000	25,400	14	12.2	734762
	CA*F3636*6A*+G*V950905D**	35,000	25,400	14	12.2	734876
	CA*F3636*6A*+G*V951155D**	35,000	25,400	14	12.2	734690
	CA*F3636*6A*+MBE1600	35,000	25,400	14	12.2	734846
	CA*F3642*6A*+EEP	35,000	25,550	13	11.5	1038152
	CHPF048D2*+EEP	35,000	25,400	13	11.5	734831
	CHPF048D2*+G*V80704B**	35,000	25,400	14	12.2	734887
	CHPF048D2*+G*V80905C**	35,000	25,400	14	12.2	734667
	CHPF048D2*+G*V90905D**	35,000	25,400	14	12.2	734893
	CHPF048D2*+G*V950905D**	35,000	25,400	14	12.2	734697
	CHPF048D2*+G*V951155D**	35,000	25,400	14	12.2	734851
	CHPF3636B6A*+EEP	35,000	25,400	13	11.5	734707
	CHPF3642C6A*+EEP	35,000	25,400	13	11.5	734689
	CHPF3642D6A*+EEP	35,000	25,400	13	11.5	735963
	CHPF3642D6A*+G*V80704B**	35,000	25,400	14	12.2	734829
	CHPF3642D6A*+G*V80905C**	35,000	25,400	14	12.2	734751

[1] Seasonal Energy Efficiency Ratio
[2] Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

Notes:

- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- XX of a model designates Electric Heat kilowatts.
- EEP: Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER[1]	EER[2]	ARI #
		Total	Sensible			
GSC130 361A* (cont.)	CHPF3642D6A*+G*V90905D**	35,000	25,400	14	12.2	734653
	CHPF3642D6A*+G*V950905D**	35,000	25,400	14	12.2	734782
	CHPF3642D6A*+G*V951155D**	35,000	25,400	14	12.2	734810
	CSCF3036N6A*+EEP	35,000	25,400	13	11.5	734768
	CSCF3036N6A*+G*V80704B**	35,000	25,400	14	12.2	734678
	CSCF3036N6A*+G*V80905C**	35,000	25,400	14	12.2	734786
	CSCF3036N6A*+G*V90905D**	35,000	25,400	14	12.2	734675
	CSCF3036N6A*+G*V950905D**	35,000	25,400	14	12.2	734812
	CSCF3036N6A*+G*V951155D**	35,000	25,400	14	12.2	734779
	CSCF3642*6A*+EEP	35,000	25,550	13	11.5	1002300
	H49F+EEP	35,000	25,400	13	11.5	734758
	H49F+G*V80704B**	35,000	25,400	14	12.2	734898
	H49F+G*V80905C**	35,000	25,400	14	12.2	734870
	H49F+G*V90905D**	35,000	25,400	14	12.2	734883
	H49F+G*V950905D**	35,000	25,400	14	12.2	734855
	H49F+G*V951155D**	35,000	25,400	14	12.2	734850
	H60F+EEP	35,000	25,550	13	11.5	1002305
GSC13 0361B*	ADPF304216A*	35,000	25,550	13	11.5	1038116
	ADPF30421A*	35,000	25,400	13	11.5	736231
	AEPF303616A*	35,000	25,550	14	12.2	1038117
	AEPF30361A*	35,000	25,400	14	12.2	736222
	AEPT036-00*-1*	35,000	25,400	14	12.2	736243
	ARPF048-00B-1*	35,000	25,400	13	11.5	736258
	ARPF364216A*	35,000	25,550	13	11.5	1038118
	ARPF36421A*	35,000	25,400	13	11.5	736239
	ARPT049-00*-1*	35,000	25,400	13	11.5	736237
	ARUF049-00*-1*	35,000	25,550	13	11.5	736536
	ARUF364216A*	33,600	24,528	13	11.5	1038119
	ARUF36421A*	35,000	25,550	13	11.5	736538
	AWB36-XX	33,600	24,400	13	11.5	736249
	AWUF36XX1A*	33,600	24,400	13	11.5	736264
	CA*F048*2*+EEP	35,000	25,400	13	11.5	735131
	CA*F048*2*+G*V80704B**	35,000	25,400	14	12.2	736230
	CA*F048*2*+G*V80905C**	35,000	25,400	14	12.2	736241
	CA*F048*2*+G*V90905D**	35,000	25,400	14	12.2	736248
	CA*F048*2*+G*V950905D**	35,000	25,400	14	12.2	736250
	CA*F048*2*+G*V951155D**	35,000	25,400	14	12.2	736235
	CA*F048*2*+MBE1600	35,000	25,400	14	12.2	736254
	CA*F3636*6A*+EEP	35,000	25,400	13	11.5	735128
	CA*F3636*6A*+G*V80704B**	35,000	25,400	14	12.2	736245
	CA*F3636*6A*+G*V80905C**	35,000	25,400	14	12.2	736225
	CA*F3636*6A*+G*V90905D**	35,000	25,400	14	12.2	736232
	CA*F3636*6A*+G*V950905D**	35,000	25,400	14	12.2	736246
	CA*F3636*6A*+G*V951155D**	35,000	25,400	14	12.2	736253
	CA*F3636*6A*+MBE1600	35,000	25,400	14	12.2	736238
	CHPF048D2*+EEP	35,000	25,400	13	11.5	735134
	CHPF048D2*+G*V80704B**	35,000	25,400	14	12.2	736255

See Notes on Page 9.

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER[1]	EER[2]	ARI #
		Total	Sensible			
GSC13 0361B* (cont.)	CHPF048D2*+G*V80905C**	35,000	25,400	14	12.2	736263
	CHPF048D2*+G*V90905D**	35,000	25,400	14	12.2	736233
	CHPF048D2*+G*V950905D**	35,000	25,400	14	12.2	736226
	CHPF048D2*+G*V951155D**	35,000	25,400	14	12.2	736234
	CHPF3636B6A*+EEP	35,000	25,400	13	11.5	735053
	CHPF3642C6A*+EEP	35,000	25,400	13	11.5	735183
	CHPF3642D6A*+EEP	35,000	25,400	13	11.5	735967
	CHPF3642D6A*+G*V80704B**	35,000	25,400	14	12.2	736227
	CHPF3642D6A*+G*V80905C**	35,000	25,400	14	12.2	736242
	CHPF3642D6A*+G*V90905D**	35,000	25,400	14	12.2	736257
	CHPF3642D6A*+G*V950905D**	35,000	25,400	14	12.2	736262
	CHPF3642D6A*+G*V951155D**	35,000	25,400	14	12.2	736236
	CSCF3036N6A*+EEP	35,000	25,400	13	11.5	735205
	CSCF3036N6A*+G*V80704B**	35,000	25,400	14	12.2	736224
	CSCF3036N6A*+G*V80905C**	35,000	25,400	14	12.2	736240
	CSCF3036N6A*+G*V90905D**	35,000	25,400	14	12.2	736259
	CSCF3036N6A*+G*V950905D**	35,000	25,400	14	12.2	736228
	CSCF3036N6A*+G*V951155D**	35,000	25,400	14	12.2	736223
	CSCF3642N6A*+EEP	35,000	25,550	13	11.5	1032287
	H49F+EEP	35,000	25,400	13	11.5	735965
	H49F+G*V80704B**	35,000	25,400	14	12.2	736260
	H49F+G*V80905C**	35,000	25,400	14	12.2	736229
	H49F+G*V90905D**	35,000	25,400	14	12.2	736256
	H49F+G*V950905D**	35,000	25,400	14	12.2	736251
	H49F+G*V951155D**	35,000	25,400	14	12.2	736244
	H60F+EEP	35,000	25,550	13	11.5	1032244
GSC13 0361C*	ADPF304216A*	35,000	25,550	13	11.5	1038120
	ADPF30421A*	35,000	25,550	13	11.5	1032272
	AEPF30361**	35,000	25,550	14	12.2	1032273
	AEPF303616A*	35,000	25,550	14	12.2	1038121
	AEPT036-00*-1*	35,000	25,550	14	12.2	1032274
	ARPF048-00B-1*	35,000	25,550	13	11.5	1032275
	ARPF364216A*	35,000	25,550	13	11.5	1038122
	ARPF36421A*	35,000	25,550	13	11.5	1032276
	ARPT049-00*-1*	35,000	25,550	13	11.5	1032277
	ARUF049-00*-1*	33,600	24,528	13	11.5	1032294
	ARUF364216A*	33,600	24,528	13	11.5	1038123
	ARUF36421A*	33,600	24,528	13	11.5	1032297
	AWB36-XX	33,600	24,528	13	11.5	1032283
	AWUF36XX1A*	33,600	24,528	13	11.5	1032284
	CA*F048*2*+EEP	35,000	25,550	13	11.5	1032296
	CA*F048*2*+G*V80704B**	35,000	25,550	14	12.2	1032281
	CA*F048*2*+G*V80905C**	35,000	25,550	14	12.2	1032282
	CA*F048*2*+G*V90905D**	35,000	25,550	14	12.2	1032279
	CA*F048*2*+G*V950905D**	35,000	25,550	14	12.2	1032280
	CA*F048*2*+G*V951155D**	35,000	25,550	14	12.2	1032278
	CA*F048*2*+MBE1600**-1	35,000	25,550	14	12.2	1032295

See Notes on Page 9.

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER[1]	EER[2]	ARI #
		Total	Sensible			
GSC13 0361C* (cont.)	CA*F3636*6A*+EEP	35,000	25,550	13	11.5	1032293
	CA*F3636*6A*+G*V80704B**	35,000	25,550	14	12.2	1032266
	CA*F3636*6A*+G*V80905C**	35,000	25,550	14	12.2	1032267
	CA*F3636*6A*+G*V90905D**	35,000	25,550	14	12.2	1032268
	CA*F3636*6A*+G*V950905D**	35,000	25,550	14	12.2	1032269
	CA*F3636*6A*+G*V951155D**	35,000	25,550	14	12.2	1032270
	CA*F3636*6A*+MBE1600**-1	35,000	25,550	14	12.2	1032271
	CHPF048D2*+EEP	35,000	25,550	13	11.5	1032292
	CHPF048D2*+G*V80704B**	35,000	25,550	14	12.2	1032261
	CHPF048D2*+G*V80905C**	35,000	25,550	14	12.2	1032262
	CHPF048D2*+G*V90905D**	35,000	25,550	14	12.2	1032263
	CHPF048D2*+G*V950905D**	35,000	25,550	14	12.2	1032265
	CHPF048D2*+G*V951155D**	35,000	25,550	14	12.2	1032264
	CHPF3636B6A*+EEP	35,000	25,550	13	11.5	1032291
	CHPF3642C6A*+EEP	35,000	25,550	13	11.5	1032290
	CHPF3642D6A*+EEP	35,000	25,550	13	11.5	1032289
	CHPF3642D6A*+G*V80704B**	35,000	25,550	14	12.2	1032260
	CHPF3642D6A*+G*V80905C**	35,000	25,550	14	12.2	1032259
	CHPF3642D6A*+G*V90905D**	35,000	25,550	14	12.2	1032257
	CHPF3642D6A*+G*V950905D**	35,000	25,550	14	12.2	1032258
	CHPF3642D6A*+G*V951155D**	35,000	25,550	14	12.2	1032254
	CSCF3036N6A*+EEP	35,000	25,550	13	11.5	1032286
	CSCF3036N6A*+G*V80704B**	35,000	25,550	14	12.2	1032255
	CSCF3036N6A*+G*V80905C**	35,000	25,550	14	12.2	1032256
	CSCF3036N6A*+G*V90905D**	35,000	25,550	14	12.2	1032253
	CSCF3036N6A*+G*V950905D**	35,000	25,550	14	12.2	1032251
	CSCF3036N6A*+G*V951155D**	35,000	25,550	14	12.2	1032252
	CSCF3642N6A*+EEP	35,000	25,550	13	11.5	1032288
	H49F+EEP	35,000	25,550	13	11.5	1032285
	H49F+G*V80704B**	35,000	25,550	14	12.2	1032248
	H49F+G*V80905C**	35,000	25,550	14	12.2	1032249
	H49F+G*V90905D**	35,000	25,550	14	12.2	1032250
	H49F+G*V950905D**	35,000	25,550	14	12.2	1032246
	H49F+G*V951155D**	35,000	25,550	14	12.2	1032247
	H60F+EEP	35,000	25,550	13	11.5	1032245
GSC13 0361D*	ADPF304216A*	35,000	25,550	13	11.5	1118147
	ADPF30421A*	35,000	25,400	13	11.5	1118201
	AEPF303616A*	35,000	25,550	14	12.2	1118148
	AEPF30361A*	35,000	25,400	14	12.2	1118202
	AEPT036-00*-1*	35,000	25,400	14	12.2	1128836
	ARPF048-00B-1*	35,000	25,400	13	11.5	1118200
	ARPF364216A*	35,000	25,550	13	11.5	1118149
	ARPF36421A*	35,000	25,400	13	11.5	1118198
	ARPT049-00*-1*	35,000	25,400	13	11.5	1128841
	ARUF049-00*-1*	35,000	25,550	13	11.5	1118199
	ARUF364216A*	33,600	24,528	13	11.5	1118150

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER[1]	EER[2]	ARI #
		Total	Sensible			
GSC13 0361D* (cont.)	ARUF36421A*	35,000	25,550	13	11.5	1118197
	AWB36-XX	33,600	24,400	13	11.5	1118196
	AWUF36XX1A*	33,600	24,400	13	11.5	1118195
	CA*F048*2*+EEP	35,000	25,400	13	11.5	1118194
	CA*F048*2*+G*V80704B**	35,000	25,400	14	12.2	1118189
	CA*F048*2*+G*V80905C**	35,000	25,400	14	12.2	1118190
	CA*F048*2*+G*V90905D**	35,000	25,400	14	12.2	1118191
	CA*F048*2*+G*V950905D**	35,000	25,400	14	12.2	1118192
	CA*F048*2*+G*V951155D**	35,000	25,400	14	12.2	1118193
	CA*F048*2*+MBE1600	35,000	25,400	14	12.2	1118188
	CA*F3636*6A*+EEP	35,000	25,400	13	11.5	1118184
	CA*F3636*6A*+G*V80704B**	35,000	25,400	14	12.2	1118185
	CA*F3636*6A*+G*V80905C**	35,000	25,400	14	12.2	1118186
	CA*F3636*6A*+G*V90905D**	35,000	25,400	14	12.2	1118187
	CA*F3636*6A*+G*V950704C**	35,000	25,400	14	12.2	1126465
	CA*F3636*6A*+G*V950905D**	35,000	25,400	14	12.2	1118182
	CA*F3636*6A*+G*V951155D**	35,000	25,400	14	12.2	1118183
	CA*F3636*6A*+MBE1600	35,000	25,400	14	12.2	1118179
	CHPF048D2*+EEP	35,000	25,400	13	11.5	1145062
	CHPF048D2*+G*V80704B**	35,000	25,400	14	12.2	1118180
	CHPF048D2*+G*V80905C**	35,000	25,400	14	12.2	1118181
	CHPF048D2*+G*V90905D**	35,000	25,400	14	12.2	1118178
	CHPF048D2*+G*V950905D**	35,000	25,400	14	12.2	1118177
	CHPF048D2*+G*V951155D**	35,000	25,400	14	12.2	1118176
	CHPF3636B6A*+EEP	35,000	25,400	13	11.5	1118175
	CHPF3642C6A*+EEP	35,000	25,400	13	11.5	1118174
	CHPF3642D6A*+EEP	35,000	25,400	13	11.5	1118173
	CHPF3642D6A*+G*V80704B**	35,000	25,400	14	12.2	1118172
	CHPF3642D6A*+G*V80905C**	35,000	25,400	14	12.2	1118170
	CHPF3642D6A*+G*V90905D**	35,000	25,400	14	12.2	1118171
	CHPF3642D6A*+G*V950905D**	35,000	25,400	14	12.2	1118169
	CHPF3642D6A*+G*V951155D**	35,000	25,400	14	12.2	1118168
	CSCF3036N6A*+EEP	35,000	25,400	13	11.5	1118167
	CSCF3036N6A*+G*V80704B**	35,000	25,400	14	12.2	1118165
	CSCF3036N6A*+G*V80905C**	35,000	25,400	14	12.2	1118166
	CSCF3036N6A*+G*V90905D**	35,000	25,400	14	12.2	1118164
	CSCF3036N6A*+G*V950905D**	35,000	25,400	14	12.2	1118163
	CSCF3036N6A*+G*V951155D**	35,000	25,400	14	12.2	1118162
	H49F+EEP	35,000	25,400	13	11.5	1118161
	H49F+G*V80704B**	35,000	25,400	14	12.2	1118160
	H49F+G*V80905C**	35,000	25,400	14	12.2	1118158
	H49F+G*V90905D**	35,000	25,400	14	12.2	1118159
	H49F+G*V950905D**	35,000	25,400	14	12.2	1118157
	H49F+G*V951155D**	35,000	25,400	14	12.2	1118156
	H60F+EEP	35,000	25,550	13	11.5	1118155

[1] Seasonal Energy Efficiency Ratio
[2] Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

See Notes on Page 14.

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER[1]	EER[2]	ARI #
		Total	Sensible			
GSC13 0363A*	ADPF304216A*	35,000	25,550	13	11.5	1038171
	ADPF30421A*	35,000	25,550	13	11.5	735061
	AEPF303616A*	35,000	25,550	14	12.2	1038170
	AEPF30361A*	35,000	25,550	14	12.2	735042
	AEPT036-00*-1*	35,000	25,550	14	12.2	735118
	ARPF048-00B-1*	35,000	25,550	13	11.5	735048
	ARPF364216A*	35,000	25,550	13	11.5	1038169
	ARPF36421A*	35,000	25,550	13	11.5	735038
	ARPT049-00*-1*	35,000	25,550	13	11.5	735181
	CA*F048*2*+EEP	35,000	25,550	13	11.5	735113
	CA*F3636*6A*+EEP	35,000	25,550	13	11.5	735184
	CHPF048D2*+EEP	35,000	25,550	13	11.5	735064
	CHPF3636B6A*+EEP	35,000	25,550	13	11.5	735246
	CHPF3642C6A*+EEP	35,000	25,550	13	11.5	735126
	CHPF3642D6A*+EEP	35,000	25,550	13	11.5	735966
	CSCF3036N6A*+EEP	35,000	25,550	13	11.5	735236
	H49F+EEP	35,000	25,550	13	11.5	735111
GSC13 0421A*	ADPF304216A*	40,500	30,375	13	11.5	1038124
	ADPF30421A*	40,500	30,800	13	11.5	734788
	AEPF426016A*	41,000	30,750	14	12.2	1038125
	AEPF42601A*	41,000	30,800	14	12.2	734878
	AEPT060-00*-1*	41,000	30,800	14	12.2	734783
	ARPF048-00B-1*	40,500	30,400	13	11.5	734861
	ARPF364216A*	40,500	30,375	13	11.5	1038126
	ARPF36421A*	40,500	30,400	13	11.5	734843
	ARPT049-00*-1*	40,500	30,400	13	11.5	734833
	ARUF049-00*-1*	40,500	30,400	13	11.5	734650
	ARUF364216A*	40,500	30,375	13	11.5	1038127
	ARUF36421A*	40,500	30,400	13	11.5	734857
	ARUF486016A*	41,500	31,125	13	11.5	1038142
	ARUF48601A*	41,500	31,125	13	11.5	1038141
	CA*F060*2*+EEP	40,500	30,400	13	11.5	734676
	CA*F060*2*+MBE1600	40,500	30,400	14	12.2	734897
	CA*F061*2*+G*V80905C**	41,500	31,000	14	12.2	734670

[1] Seasonal Energy Efficiency Ratio
[2] Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

Notes:
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- XX of a model designates Electric Heat kilowatts.
- EEP: Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER[1]	EER[2]	ARI #
		Total	Sensible			
GSC13 0421A* (cont.)	CA*F061*2*+G*V81155C**	41,500	31,000	14	12.2	734681
	CA*F061*2*+G*V90905D**	41,500	31,000	13.5	11.8	734679
	CA*F061*2*+G*V950905D**	41,500	31,000	13.5	11.8	734753
	CA*F061*2*+G*V951155D**	41,500	31,000	13.5	11.8	734776
	CA*F3642*6A*+EEP	40,500	30,400	13	11.5	734694
	CA*F3642*6A*+MBE1600	40,500	30,400	14	12.2	734702
	CA*F4860*6A*+G*V80905C**	41,500	31,000	14	12.2	734896
	CA*F4860*6A*+G*V81155C**	41,500	31,000	14	12.2	734789
	CA*F4860*6A*+G*V90905D**	41,500	31,000	13.5	11.8	734665
	CA*F4860*6A*+G*V950905D**	41,500	31,000	13.5	11.8	734811
	CA*F4860*6A*+G*V951155D**	41,500	31,000	13.5	11.8	734864
	CAPF061*2*+EEP	41,000	30,750	13	11.5	1002303
	CAPF4860*6A*+EEP	41,000	30,750	13	11.5	1002304
	CHPF048D2*+EEP	40,500	30,400	13	11.5	734740
	CHPF060D2*+EEP	41,000	30,750	13	11.5	1002301
	CHPF060D2*+G*V81155C**	41,500	31,000	14	12.2	734868
	CHPF060D2*+G*V90905D**	41,500	31,000	13.5	11.8	734862
	CHPF060D2*+G*V951155D**	41,500	31,000	13.5	11.8	734677
	CHPF3642C6A*+EEP	40,500	30,400	13	11.5	734725
	CHPF3642D6A*+EEP	40,500	30,400	13	11.5	734682
	CHPF4860D6A*+EEP	41,000	30,750	13	11.5	1002302
	CHPF4860D6A*+G*V81155C**	41,500	31,000	14	12.2	734652
	CHPF4860D6A*+G*V90905D**	41,500	31,000	13.5	11.8	734838
	CHPF4860D6A*+G*V951155D**	41,500	31,000	13.5	11.8	734759
	CSCF3642N6A*+EEP	41,500	31,000	13	11.5	734769
	CSCF4860N6A*+G*V81155C**	41,500	31,000	14	12.2	734800
	CSCF4860N6A*+G*V90905D**	41,500	31,000	13.5	11.8	734763
	CSCF4860N6A*+G*V951155D**	41,500	31,000	13.5	11.8	734749
	H60F+EEP	41,500	31,000	13	11.5	734872
	H61F+EEP	42,000	31,500	13	11.5	1038150
	H61F+G*V81155C**	41,500	31,000	14	12.2	734684
	H61F+G*V90905D**	41,500	31,000	13.5	11.8	734771
	H61F+G*V951155D**	41,500	31,000	13.5	11.8	734683
GSC13 0481A*	ADPF486016A*	45,500	33,670	13	11.5	1038128
	ADPF48601A*	45,500	33,800	13	11.5	734791
	AEPF426016A*	45,500	33,670	14	12.2	1038129
	AEPF42601A*	45,500	33,800	14	12.2	734696
	AEPT060-00*-1*	45,500	33,800	14	12.2	734757
	ARPF060-00B-1*	45,500	33,800	13	11.5	734756
	ARPF486016A*	45,500	33,670	13	11.5	1038130
	ARPF48601A*	45,500	33,800	13	11.5	734813
	ARPT061-00*-1*	45,500	33,800	13	11.5	734853
	ARUF061-00*-1*	45,500	33,800	13	11.5	734703
	ARUF486016A*	45,500	33,670	13	11.5	1038131
	ARUF48601A*	45,500	33,800	13	11.5	734772

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER[1]	EER[2]	ARI #
		Total	Sensible			
GSC13 0481A* (cont.)	CA*F061*2*+EEP	45,500	33,800	13	11.5	734699
	CA*F061*2*+G*V80905C**	45,500	33,800	13.5	11.8	734854
	CA*F061*2*+G*V81155C**	45,500	33,800	13.5	11.8	734881
	CA*F061*2*+G*V90905D**	45,500	33,800	13.5	11.8	734719
	CA*F061*2*+G*V950905D**	45,500	33,800	13.5	11.8	734734
	CA*F061*2*+G*V951155D**	45,500	33,800	13.5	11.8	734720
	CA*F061*2*+MBE2000	45,500	33,800	14	12.2	734712
	CA*F4860*6A*+EEP	45,500	33,800	13	11.5	734828
	CA*F4860*6A*+G*V80905C**	45,500	33,800	13.5	11.8	734663
	CA*F4860*6A*+G*V81155C**	45,500	33,800	13.5	11.8	734750
	CA*F4860*6A*+G*V90905D**	45,500	33,800	13.5	11.8	734733
	CA*F4860*6A*+G*V950905D**	45,500	33,800	13.5	11.8	734822
	CA*F4860*6A*+G*V951155D**	45,500	33,800	13.5	11.8	734796
	CA*F4860*6A*+MBE2000	45,500	33,800	14	12.2	734729
	CHPF060D2*+EEP	45,500	33,800	13	11.5	734825
	CHPF060D2*+G*V80905C**	45,500	33,800	13.5	11.8	734669
	CHPF060D2*+G*V81155C**	45,500	33,800	13.5	11.8	734808
	CHPF060D2*+G*V90905D**	45,500	33,800	13.5	11.8	734899
	CHPF060D2*+G*V950905D**	45,500	33,800	13.5	11.8	734839
	CHPF060D2*+G*V951155D**	45,500	33,670	13.5	11.8	736537
	CHPF4860D6A*+EEP	45,500	33,800	13	11.5	734877
	CHPF4860D6A*+G*V80905C**	45,500	33,800	13.5	11.8	734688
	CHPF4860D6A*+G*V81155C**	45,500	33,800	13.5	11.8	734869
	CHPF4860D6A*+G*V90905D**	45,500	33,800	13.5	11.8	734708
	CHPF4860D6A*+G*V950905D**	45,500	33,800	13.5	11.8	734713
	CHPF4860D6A*+G*V951155D**	45,500	33,670	13.5	11.8	736533
	CSCF4860N6A*+EEP	45,500	33,800	13	11.5	734885
	CSCF4860N6A*+G*V80905C**	45,500	33,800	13.5	11.8	734780
	CSCF4860N6A*+G*V81155C**	45,500	33,800	13.5	11.8	734778
	CSCF4860N6A*+G*V90905D**	45,500	33,800	13.5	11.8	734716
	CSCF4860N6A*+G*V950905D**	45,500	33,800	13.5	11.8	734655
	CSCF4860N6A*+G*V951155D**	45,500	33,800	13.5	11.8	734721
	H61F+EEP	45,500	33,800	13	11.5	734735
	H61F+G*V80905C**	45,500	33,800	13.5	11.8	734792
	H61F+G*V81155C**	45,500	33,800	13.5	11.8	734715
	H61F+G*V90905D**	45,500	33,800	13.5	11.8	734797
	H61F+G*V950905D**	45,500	33,800	13.5	11.8	734834
	H61F+G*V951155D**	45,500	33,800	13.5	11.8	734777

[1] Seasonal Energy Efficiency Ratio
[2] Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

Notes:
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- XX of a model designates Electric Heat kilowatts.
- EEP: Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER[1]	EER[2]	ARI #
		Total	Sensible			
GSC13 0483/4A*	ADPF48601A*	45,500	33,800	13	11.5	735198
	AEPF42601A*	45,500	33,800	14	12.2	735125
	AEPT060-00*-1*	45,500	33,800	14	12.2	735116
	ARPF060-00B-1*	45,500	33,800	13	11.5	735081
	ARPF48601A*	45,500	33,800	13	11.5	735074
	ARPT061-00*-1*	45,500	33,800	13	11.5	735196
	ARUF061-00*-1*	45,500	33,800	13	11.5	735121
	ARUF48601A*	45,500	33,800	13	11.5	735123
	CA*F061*2*+EEP	45,500	33,800	13	11.5	735099
	CA*F4860*6A*+EEP	45,500	33,800	13	11.5	735050
	CHPF060D2*+EEP	45,500	33,800	13	11.5	735047
	CHPF4860D6A*+EEP	45,500	33,800	13	11.5	735049
	CSCF4860N6A*+EEP	45,500	33,800	13	11.5	735157
	H61F+EEP	45,500	33,800	13	11.5	735156
GSC13 0483A*	ADPF486016A*	45,500	33,670	13	11.5	1038168
	ADPF48601A*	45,500	33,670	13	11.5	872332
	AEPF426016A*	45,500	33,670	14	12.2	1038167
	AEPF42601A*	45,500	33,670	14	12.2	872366
	AEPT060-00*-1*	45,500	33,670	14	12.2	872400
	ARPF060-00B-1*	45,500	33,670	13	11.5	872345
	ARPF486016A*	45,500	33,670	13	11.5	1038165
	ARPF48601A*	45,500	33,670	13	11.5	872351
	ARPT061-00*-1*	45,500	33,670	13	11.5	872223
	ARUF061-00*-1*	45,500	33,670	13	11.5	872220
	ARUF486016A*	45,500	33,670	13	11.5	1038166
	ARUF48601A*	45,500	33,670	13	11.5	872282
	CA*F061*2*+EEP	45,500	33,670	13	11.5	869440
	CA*F4860*6A*+EEP	45,500	33,670	13	11.5	869438
	CHPF060D2*+EEP	45,500	33,670	13	11.5	869450
	CHPF4860D6A*+EEP	45,500	33,670	13	11.5	869456
	CSCF4860N6A*+EEP	45,500	33,670	13	11.5	869457
	H61F+EEP	45,500	33,670	13	11.5	869462
GSC13 0484A*	ADPF486016A*	45,500	33,670	13	11.5	1038164
	ADPF48601A*	45,500	33,670	13	11.5	872367
	AEPF426016A*	45,500	33,670	14	12.2	1038163
	AEPF42601A*	45,500	33,670	14	12.2	872388
	AEPT060-00*-1*	45,500	33,670	14	12.2	872398
	ARPF060-00B-1*	45,500	33,670	13	11.5	872371
	ARPF486016A*	45,500	33,670	13	11.5	1038162
	ARPF48601A*	45,500	33,670	13	11.5	872337
	ARPT061-00*-1*	45,500	33,670	13	11.5	872300
	ARUF061-00*-1*	45,500	33,670	13	11.5	872276
	ARUF486016A*	45,500	33,670	13	11.5	1038161
	ARUF48601A*	45,500	33,670	13	11.5	872232
	CA*F061*2*+EEP	45,500	33,670	13	11.5	869474
	CA*F4860*6A*+EEP	45,500	33,670	13	11.5	869464
	CHPF060D2*+EEP	45,500	33,670	13	11.5	869467
	CHPF4860D6A*+EEP	45,500	33,670	13	11.5	869465
	CSCF4860N6A*+EEP	45,500	33,670	13	11.5	869454
	H61F+EEP	45,500	33,670	13	11.5	869461

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER[1]	EER[2]	ARI #
		Total	Sensible			
GSC13 0601B*	ADPF486016A*	57,000	41,200	13	11.5	1038132
	ADPF48601A*	57,000	41,200	13	11.5	734731
	AEPF426016A*	57,000	41,200	13.5	11.8	1038133
	AEPF42601A*	57,000	41,200	13.5	11.8	734754
	AEPT060-00*-1*	57,000	41,200	13.5	11.8	734686
	ARPF060-00B-1*	57,000	41,200	13	11.5	734901
	ARPF486016A*	57,000	41,200	13	11.5	1038134
	ARPF48601A*	57,000	41,200	13	11.5	734820
	ARPT061-00*-1*	57,000	41,200	13	11.5	734745
	ARUF061-00*-1*	57,000	41,200	13	11.5	734723
	ARUF486016A*	57,000	41,200	13	11.5	1038135
	ARUF48601A*	57,000	41,200	13	11.5	734858
	CA*F061*2*+EEP	57,000	41,200	13	11.5	734866
	CA*F061*2*+G*V80905C**	57,000	41,200	13.3	11.6	734673
	CA*F061*2*+G*V81155C**	57,000	41,200	13.3	11.6	734852
	CA*F061*2*+G*V90905D**	57,000	41,200	13.3	11.6	734874
	CA*F061*2*+MBE2000	57,000	41,200	13.5	11.8	734849
	CA*F4860*6A*+EEP	57,000	41,200	13	11.5	734741
	CA*F4860*6A*+G*V80905C**	57,000	41,200	13.3	11.6	734755
	CA*F4860*6A*+G*V81155C**	57,000	41,200	13.3	11.6	734710
	CA*F4860*6A*+G*V90905D**	57,000	41,200	13.3	11.6	734685
	CA*F4860*6A*+MBE2000	57,000	41,200	13.5	11.8	734658
	CHPF060D2*+EEP	57,000	41,200	13	11.5	734709
	CHPF060D2*+G*V80905C**	57,000	41,200	13.3	11.6	734847
	CHPF060D2*+G*V81155C**	57,000	41,200	13.3	11.6	734766
	CHPF060D2*+G*V90905D**	57,000	41,200	13.3	11.6	734706
	CHPF4860D6A*+EEP	57,000	41,200	13	11.5	734701
	CHPF4860D6A*+G*V80905C**	57,000	41,200	13.3	11.6	734790
	CHPF4860D6A*+G*V81155C**	57,000	41,200	13.3	11.6	734662
	CHPF4860D6A*+G*V90905D**	57,000	41,200	13.3	11.6	734832
	CSCF4860N6A*+EEP	56,000	40,400	13	11.5	734860
	CSCF4860N6A*+G*V80905C**	56,000	40,400	13.3	11.6	734770
	CSCF4860N6A*+G*V81155C**	56,000	40,400	13.3	11.6	734674
	CSCF4860N6A*+G*V90905D**	56,000	40,400	13.3	11.6	735964
	H61F+EEP	56,000	40,400	13	11.5	734711
	H61F+G*V80905C**	56,000	40,400	13.3	11.6	734752
	H61F+G*V81155C**	56,000	40,400	13.3	11.6	734882
	H61F+G*V90905D**	56,000	40,400	13.3	11.6	734805
GSC13 0603/4A*	ADPF48601A*	57,000	41,200	13	11.5	735194
	ARPF060-00B-1*	57,000	41,200	13	11.5	735210
	ARPF48601A*	57,000	41,200	13	11.5	735144
	ARPT061-00*-1*	57,000	41,200	13	11.5	735233
	ARUF061-00*-1*	57,000	41,200	13	11.5	735249
	ARUF48601A*	57,000	41,200	13	11.5	735174
	CA*F061*2*+EEP	57,000	41,200	13	11.5	735173
	CA*F4860*6A*+EEP	57,000	41,200	13	11.5	735072

PERFORMANCE RATINGS (CONT.)

Condenser	Indoor Model	Cooling Capacity (BTU/h)		SEER[1]	EER[2]	ARI #
		Total	Sensible			
GSC13 0603/4A* (cont.)	CHPF060D2*+EEP	57,000	41,200	13	11.5	735256
	CHPF4860D6A*+EEP	57,000	41,200	13	11.5	735169
	CSCF4860N6A*+EEP	56,000	40,400	13	11.5	735239
	H61F+EEP	56,000	40,400	13	11.5	735185
GSC13 0603A*	ADPF486016A*	57,000	41,040	13	11.5	1038160
	ADPF48601A*	57,000	41,040	13	11.5	872325
	ARPF060-00B-1*	57,000	41,040	13	11.5	872227
	ARPF486016A*	57,000	41,040	13	11.5	1038159
	ARPF48601A*	57,000	41,040	13	11.5	872404
	ARPT061-00*-1*	57,000	41,040	13	11.5	872358
	ARUF061-00*-1*	57,000	41,040	13	11.5	872297
	ARUF486016A*	57,000	41,040	13	11.5	1038158
	ARUF48601A*	57,000	41,040	13	11.5	872380
	CA*F061*2*+EEP	57,000	41,040	13	11.5	869444
	CA*F4860*6A*+EEP	57,000	41,040	13	11.5	869460
	CHPF060D2*+EEP	57,000	41,040	13	11.5	869473
	CHPF4860D6A*+EEP	57,000	41,040	13	11.5	869471
	CSCF4860N6A*+EEP	56,000	40,320	13	11.5	869449
	H61F+EEP	56,000	40,320	13	11.5	869430
GSC13 0604A*	ADPF486016A*	57,000	41,040	13	11.5	1038157
	ADPF48601A*	57,000	41,040	13	11.5	872286
	ARPF060-00B-1*	57,000	41,040	13	11.5	872245
	ARPF486016A*	57,000	41,040	13	11.5	1038156
	ARPF48601A*	57,000	41,040	13	11.5	872248
	ARPT061-00*-1*	57,000	41,040	13	11.5	872250
	ARUF061-00*-1*	57,000	41,040	13	11.5	872389
	ARUF486016A*	57,000	41,040	13	11.5	1038155
	ARUF48601A*	57,000	41,040	13	11.5	872236
	CA*F061*2*+EEP	57,000	41,040	13	11.5	869432
	CA*F4860*6A*+EEP	57,000	41,040	13	11.5	869475
	CHPF060D2*+EEP	57,000	41,040	13	11.5	869448
	CHPF4860D6A*+EEP	57,000	41,040	13	11.5	869437
	CSCF4860N6A*+EEP	56,000	40,320	13	11.5	869470
	H61F+EEP	56,000	40,320	13	11.5	869459

[1] Seasonal Energy Efficiency Ratio
[2] Energy Efficiency Ratio @ 80 °F/67 °F Inside - 95 °F

Notes:
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- XX of a model designates Electric Heat kilowatts.
- EEP: Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Goodman Gas Furnace contains the EEP cooling time delay.

ACCESSORIES

Model	Description	GSC13 018	GSC13 024	GSC13 030	GSC13 036	GSC13 042	GSC13 048	GSC13 060
ABK-20	Anchor Bracket Kit ▼	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X			
CSR-U-2	Hard-start Kit				X	X	X	X
CSR-U-3	Hard-start Kit						X	X
FSK01A	Freeze Protection Kit [1]	X	X	X	X	X	X	X
LSK01A	Liquid Line Solenoid Kit [2]	X	X	X	X	X	X	X
OT18-60A	Outdoor Thermostat	X	X	X	X	X	X	X
TX3N2[2]	TXV Kit	X	X	X	X			
TX5N2[2]	TXV Kit					X	X	X

▼ Contains 20 brackets; four brackets needed to anchor unit to pad

[1] Installed on indoor coil

[2] Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit.

Goodman®

Air Conditioning & Heating

Goodman Manufacturing Company, L.P., reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

Copyright © 2007 • Goodman Manufacturing Company, L.P. • Houston, Texas
Printed in the USA.